


Newlink Cat-6 UTP Patch Panel 24-port

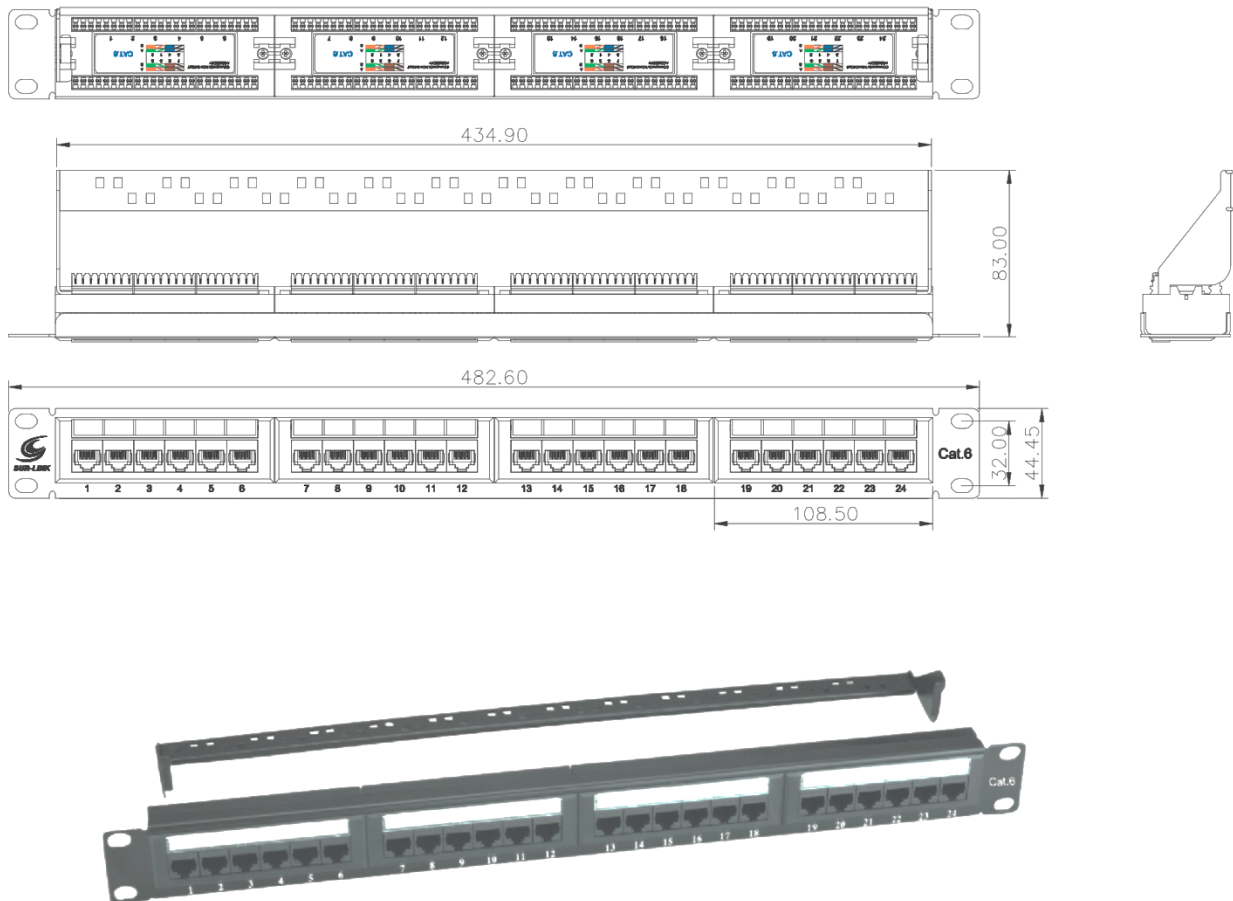

Technical Specifications:

Electrical Specifications:

Voltage Rating:	125 VCA RMS
Current Rating:	1.5 Amps
Contact Resistance:	20 Milliohms Max
Insulation Resistance:	100 Megohms Min @ 500VDC
Dielectric Strength:	750 VAC RMS @ 60Hz/1min
C6 Permanent Link:	Conform with ANSI/TIA/EIA-568 B.2-1

Mechanical Specifications:

Housing Material:	PBT + 15% GF
Panel Frame:	ST-12, Powder Coating in Black
IDC Material:	PC, Contact: Phosphor Bronze, Tin Plate

RJ45 Jack Life:	750 Cycles (min)
IDC Life:	200 Times min
Wire:	AWG 22-24
Perm. Link tested under Fluke4300, Class E in lab. The worst pair NEXT redundancy $\geq 3.0\text{dB}$	
Environmental:	
Storage Temp:	-40 to +70C
Operation Temp:	-10 to +60C
Mates with modular plug conforming to FCC Part 68, Subpart F	

Ordering Information:

Part number	Description
NEW-266624	Newlink Cat-6 UTP Patch Panel 24-port