


### UTP Cat5E Patch Panel 12-Port

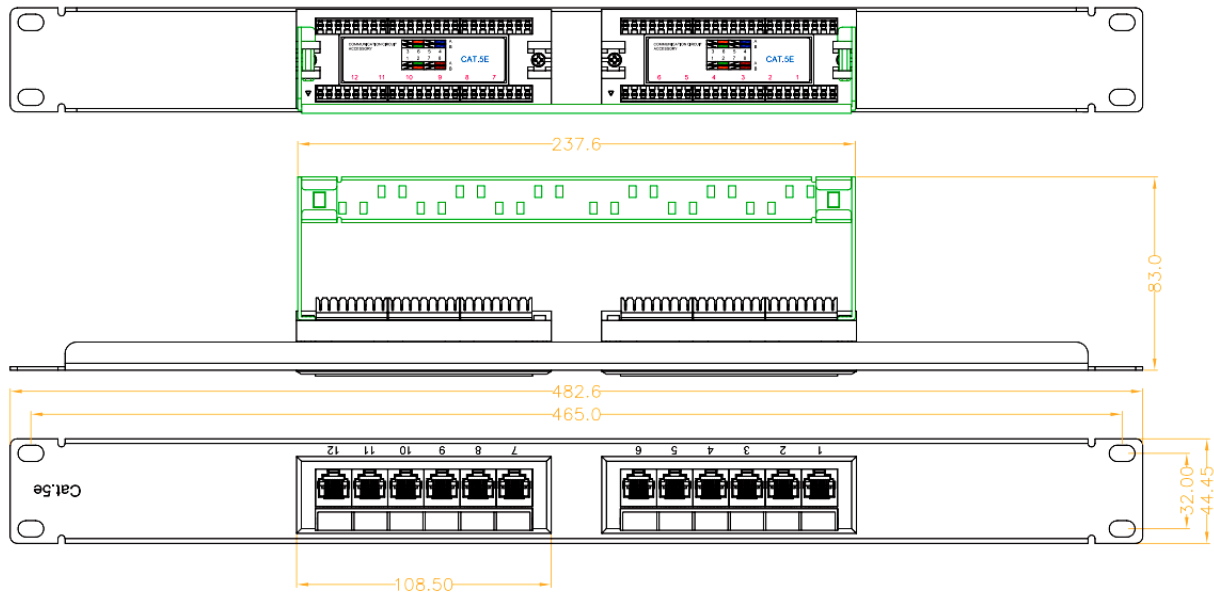

#### Features:

- Electrical:
  - Voltage Rating: 125VAC RMS
  - Current Rating: 1.5 AMP
  - Contact Resistance: 100 Milliohms Max.
  - Insulation Resistance: 1000 Megohms Min. @ 500 VDC
  - Dielectric Strength: 750 VAC RMS 60Hz, 1 min
- Environmental:
  - Storage: -40°C to +70°
  - Operation: -10°C to +60°
  - Conform to TIA/EIA 568B Cat-5E
  - Compatible with modular plug conforming to FCC part 68
- Mechanical:
  - Housing Material: PBT
  - Panel Frame: ST12, Power coating in black color
  - IDC Material: PC, Terminal: Phosphor Bronze, tin plating
  - RJ45 Jack life: 750 times min.
  - IDC Life: 200 times min.
  - Wire: AWG 22-24
  - TIA CAT5E Perm. Link Test: Worst pair NEXT margin  $\geq 5.0$ dB
  - Retentiveness of insertion structure: 50N 60 $\pm$ 5s

**Ordering Information:**

<b>Part Number</b>	<b>Description</b>
NEW-2594512	UTP Cat5E Patch Panel 12-Port